


架橋ポリエチレン絶縁ビニルシース波付鋼管がい装ビニル防食電力ケーブル

600V

CVMAZV

- 規格：JIS C 3605準拠
- 用途：電力用（埋設）
- 導体最高許容温度：90℃
- 線心識別：2心：黒，白（又は，自然色）
3心：黒，白（又は，自然色），赤
4心：黒，白（又は，自然色），赤，緑
- シース及び防食層色：黒を標準とする。

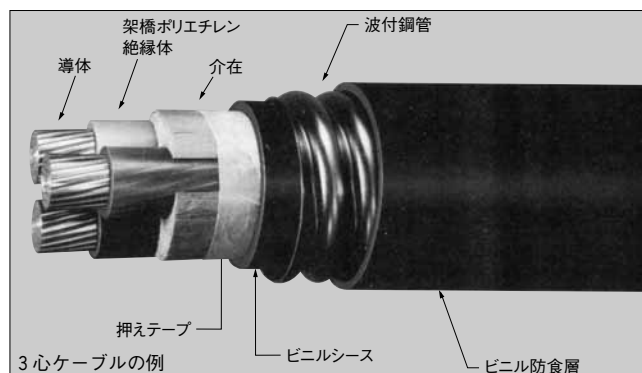

| 線心数 | 導 体 | | | 絶縁体 厚 さ (mm) | シース 厚 さ (mm) | 波付鋼管 | | 防食層 厚 さ (mm) | 仕上り 外 径 (約) (mm) | 最 大 導体抵抗 (20℃) (Ω/km) | 試験電圧 (V/1分) | 最 小 絶縁抵抗 (MΩ・km) | 概算質量 (kg/km) |
|-----|----------------------------------|-----------------------|-------------|--------------------|--------------------|-------------|--------------------|--------------------|---------------------------|--------------------------------|----------------|------------------------|-----------------|
| | 公 称 断面積 (mm ²) | 構成又は 形 状 (本/mm) | 外 径 (mm) | | | 厚 さ (mm) | 外 径 (約) (mm) | | | | | | |
| 2 心 | 2 | 7/0.6 | 1.8 | 0.8 | 1.5 | 0.3 | 15.5 | 2.5 | 21 | 9.42 | 1,500 | 2,500 | 465 |
| | 3.5 | 7/0.8 | 2.4 | 0.8 | 1.5 | 0.3 | 16.0 | 2.5 | 21 | 5.30 | 1,500 | 2,500 | 505 |
| | 5.5 | 7/1.0 | 3.0 | 1.0 | 1.5 | 0.3 | 18.5 | 2.5 | 24 | 3.40 | 1,500 | 2,500 | 620 |
| | 8 | 7/1.2 | 3.6 | 1.0 | 1.5 | 0.3 | 21 | 2.5 | 26 | 2.36 | 1,500 | 2,000 | 735 |
| | 14 | 円形圧縮 | 4.4 | 1.0 | 1.5 | 0.3 | 23 | 2.5 | 28 | 1.34 | 2,000 | 1,500 | 890 |
| | 22 | 円形圧縮 | 5.5 | 1.2 | 1.5 | 0.3 | 26 | 2.5 | 31 | 0.849 | 2,000 | 1,500 | 1,130 |
| | 38 | 円形圧縮 | 7.3 | 1.2 | 1.6 | 0.3 | 30 | 2.5 | 35 | 0.491 | 2,500 | 1,500 | 1,570 |
| | 60 | 円形圧縮 | 9.3 | 1.5 | 1.8 | 0.4 | 38 | 2.5 | 43 | 0.311 | 2,500 | 1,500 | 2,380 |
| | 100 | 円形圧縮 | 12.0 | 2.0 | 2.1 | 0.4 | 46 | 2.5 | 51 | 0.187 | 2,500 | 1,500 | 3,520 |
| | 150 | 円形圧縮 | 14.7 | 2.0 | 2.3 | 0.4 | 51 | 2.5 | 56 | 0.124 | 3,000 | 1,000 | 4,850 |
| 3 心 | 2 | 7/0.6 | 1.8 | 0.8 | 1.5 | 0.3 | 16.0 | 2.5 | 21 | 9.42 | 1,500 | 2,500 | 495 |
| | 3.5 | 7/0.8 | 2.4 | 0.8 | 1.5 | 0.3 | 18.0 | 2.5 | 23 | 5.30 | 1,500 | 2,500 | 600 |
| | 5.5 | 7/1.0 | 3.0 | 1.0 | 1.5 | 0.3 | 20 | 2.5 | 25 | 3.40 | 1,500 | 2,500 | 735 |
| | 8 | 7/1.2 | 3.6 | 1.0 | 1.5 | 0.3 | 21 | 2.5 | 26 | 2.36 | 1,500 | 2,000 | 850 |
| | 14 | 円形圧縮 | 4.4 | 1.0 | 1.5 | 0.3 | 24 | 2.5 | 29 | 1.34 | 2,000 | 1,500 | 1,090 |
| | 22 | 円形圧縮 | 5.5 | 1.2 | 1.5 | 0.3 | 27 | 2.5 | 32 | 0.849 | 2,000 | 1,500 | 1,440 |
| | 38 | 円形圧縮 | 7.3 | 1.2 | 1.7 | 0.4 | 32 | 2.5 | 37 | 0.491 | 2,500 | 1,500 | 2,070 |
| | 60 | 円形圧縮 | 9.3 | 1.5 | 1.9 | 0.4 | 39 | 2.5 | 44 | 0.311 | 2,500 | 1,500 | 2,990 |
| | 100 | 円形圧縮 | 12.0 | 2.0 | 2.2 | 0.4 | 49 | 2.5 | 54 | 0.187 | 2,500 | 1,500 | 4,560 |
| | 150 | 円形圧縮 | 14.7 | 2.0 | 2.4 | 0.4 | 54 | 2.5 | 59 | 0.124 | 3,000 | 1,000 | 6,380 |
| 4 心 | 2 | 7/0.6 | 1.8 | 0.8 | 1.5 | 0.3 | 16.0 | 2.5 | 21 | 9.42 | 1,500 | 2,500 | 580 |
| | 3.5 | 7/0.8 | 2.4 | 0.8 | 1.5 | 0.3 | 18.5 | 2.5 | 24 | 5.30 | 1,500 | 2,500 | 695 |
| | 5.5 | 7/1.0 | 3.0 | 1.0 | 1.5 | 0.3 | 21 | 2.5 | 26 | 3.40 | 1,500 | 2,500 | 840 |
| | 8 | 7/1.2 | 3.6 | 1.0 | 1.5 | 0.3 | 23 | 2.5 | 28 | 2.36 | 1,500 | 2,000 | 950 |
| | 14 | 円形圧縮 | 4.4 | 1.0 | 1.5 | 0.3 | 26 | 2.5 | 31 | 1.34 | 2,000 | 1,500 | 1,230 |
| | 22 | 円形圧縮 | 5.5 | 1.2 | 1.6 | 0.3 | 30 | 2.5 | 35 | 0.849 | 2,000 | 1,500 | 1,720 |
| | 38 | 円形圧縮 | 7.3 | 1.2 | 1.8 | 0.4 | 34 | 2.5 | 39 | 0.491 | 2,500 | 1,500 | 2,680 |
| | 60 | 円形圧縮 | 9.3 | 1.5 | 2.0 | 0.4 | 43 | 2.5 | 48 | 0.311 | 2,500 | 1,500 | 3,720 |
| | 100 | 円形圧縮 | 12.0 | 2.0 | 2.4 | 0.4 | 54 | 2.5 | 59 | 0.187 | 2,500 | 1,500 | 5,850 |
| | 150 | 円形圧縮 | 14.7 | 2.0 | 2.6 | 0.5 | 61 | 2.5 | 66 | 0.124 | 3,000 | 1,000 | 9,080 |
| 200 | 円形圧縮 | 17.0 | 2.5 | 2.9 | 0.5 | 68 | 2.5 | 73 | 0.0933 | 3,000 | 1,500 | 10,600 | |
| 250 | 円形圧縮 | 19.0 | 2.5 | 3.1 | 0.5 | 76 | 2.5 | 81 | 0.0754 | 3,000 | 1,000 | 12,600 | |
| 325 | 円形圧縮 | 21.7 | 2.5 | 3.4 | 0.5 | 84 | 2.5 | 89 | 0.0579 | 3,000 | 900 | 15,700 | |