


# ビニル絶縁ビニルシース電力ケーブル

**600V VVR**

- 規格：JIS C 3342
- 用途：電力用
- 導体最高許容温度：60℃
- 線心識別：2心：黒，白 3心：黒，白，赤  
4心：黒，白，赤，緑
- シース色：灰を標準とする。

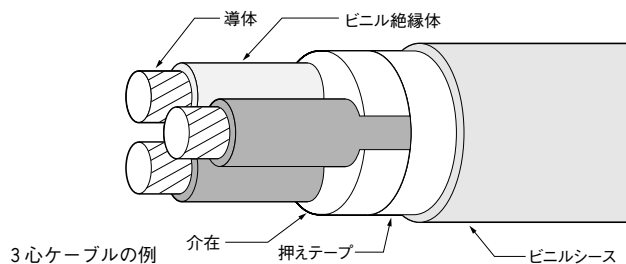

線心数	導体			絶縁体厚さ (mm)	シース厚さ (mm)	仕上り外径 (約) (mm)	最大導体抵抗 (20℃) (Ω/km)	試験電圧 (V/1分)	最小絶縁抵抗 (20℃) (MΩ・km)	概算質量 (kg/km)
	公称断面積 (mm <sup>2</sup> )	構成又は形状 (本/mm)	外径 (mm)							
単心	5.5	7/1.0	3.0	1.0	1.5	8.0	3.33	1,500	50	115
	8	7/1.2	3.6	1.2	1.5	9.0	2.31	1,500	50	155
	14	円形圧縮	4.4	1.4	1.5	10.5	1.31	2,000	40	225
	22	円形圧縮	5.5	1.6	1.5	12.0	0.832	2,000	40	320
	38	円形圧縮	7.3	1.8	1.5	14.0	0.481	2,500	40	510
	60	円形圧縮	9.3	1.8	1.5	16.0	0.305	2,500	30	735
	100	円形圧縮	12.0	2.0	1.5	19.0	0.183	2,500	30	1,160
	150	円形圧縮	14.7	2.2	1.6	23	0.122	3,000	30	1,690
	200	円形圧縮	17.0	2.4	1.7	26	0.0915	3,000	20	2,220
250	円形圧縮	19.0	2.4	1.8	28	0.0739	3,000	20	2,740	
2心	5.5	7/1.0	3.0	1.0	1.5	13.5	3.40	1,500	50	245
	8	7/1.2	3.6	1.2	1.5	15.5	2.36	1,500	50	335
	8	円形圧縮	3.4	1.2	1.5	15.5	2.34	1,500	50	325
	14	円形圧縮	4.4	1.4	1.5	18.0	1.34	2,000	40	500
	22	円形圧縮	5.5	1.6	1.5	21	0.849	2,000	40	715
	38	円形圧縮	7.3	1.8	1.7	26	0.491	2,500	40	1,165
	60	円形圧縮	9.3	1.8	1.9	31	0.311	2,500	30	1,680
	100	円形圧縮	12.0	2.0	2.1	37	0.187	2,500	30	2,670
	150	円形圧縮	14.7	2.2	2.3	44	0.124	3,000	30	3,870
200	円形圧縮	17.0	2.4	2.6	50	0.0933	3,000	20	5,090	
250	円形圧縮	19.0	2.4	2.7	54	0.0754	3,000	20	6,250	
3心	5.5	7/1.0	3.0	1.0	1.5	14.5	3.40	1,500	50	320
	8	7/1.2	3.6	1.2	1.5	16.5	2.36	1,500	50	440
	8	円形圧縮	3.4	1.2	1.5	16.0	2.34	1,500	50	425
	14	円形圧縮	4.4	1.4	1.5	19.0	1.34	2,000	40	665
	22	円形圧縮	5.5	1.6	1.6	23	0.849	2,000	40	975
	38	円形圧縮	7.3	1.8	1.8	28	0.491	2,500	40	1,590
	60	円形圧縮	9.3	1.8	1.9	33	0.311	2,500	30	2,320
	100	円形圧縮	12.0	2.0	2.2	40	0.187	2,500	30	3,720
	150	円形圧縮	14.7	2.2	2.5	47	0.124	3,000	30	5,430
200	円形圧縮	17.0	2.4	2.7	53	0.0933	3,000	20	7,130	
250	円形圧縮	19.0	2.4	2.9	58	0.0754	3,000	20	8,800	
4心	5.5	7/1.0	3.0	1.0	1.5	16.0	3.40	1,500	50	400
	8	7/1.2	3.6	1.2	1.5	18.0	2.36	1,500	50	555
	8	円形圧縮	3.4	1.2	1.5	17.5	2.34	1,500	50	535
	14	円形圧縮	4.4	1.4	1.5	21	1.34	2,000	40	855
	22	円形圧縮	5.5	1.6	1.7	25	0.849	2,000	40	1,260
	38	円形圧縮	7.3	1.8	1.9	31	0.491	2,500	40	2,060
	60	円形圧縮	9.3	1.8	2.1	36	0.311	2,500	30	3,030
	100	円形圧縮	12.0	2.0	2.4	44	0.187	2,500	30	4,870
	150	円形圧縮	14.7	2.2	2.7	52	0.124	3,000	30	7,110
200	円形圧縮	17.0	2.4	2.9	59	0.0933	3,000	20	9,330	
250	円形圧縮	19.0	2.4	3.1	65	0.0754	3,000	20	11,600	

(備考) レングスマーク入りが標準です。(単心は22SQ以上、多心は全サイズ)